




Nuts Hot Dip Galvanized

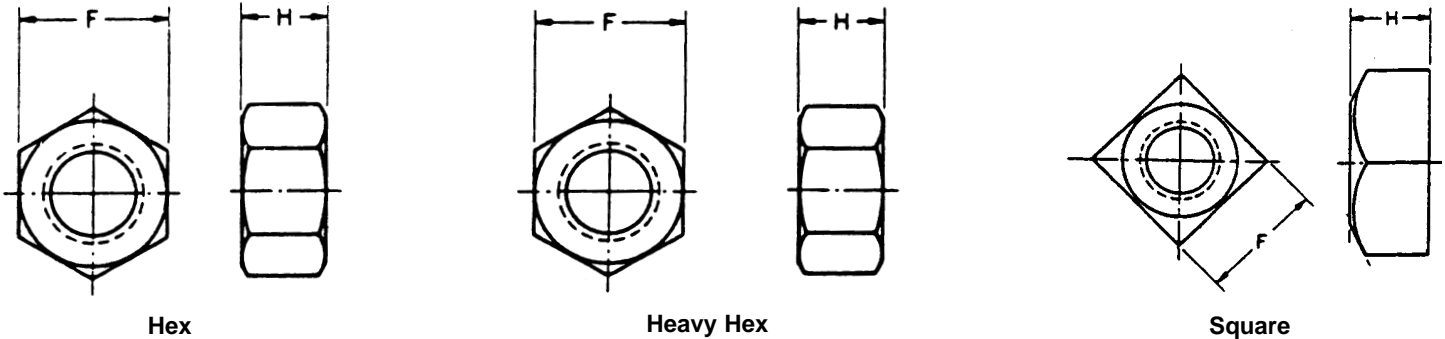

Dia.	Coarse Threads Per In.	Hex		Heavy Hex		Square	
		Width F	Thickness H	Width F	Thickness H	Width F	Thickness H
3/8	16	9/16	21/64	11/16	23/64	5/8	21/64
1/2	13	3/4	7/16	7/8	31/64	13/16	7/16
5/8	11	15/16	35/64	1-1/16	39/64	1	35/64
3/4	10	1-1/8	41/64	1-1/4	47/64	1-1/8	21/32
7/8	9	1-5/16	3/4	1-7/16	55/64	1-5/16	49/64
1	8	1-1/2	55/64	1-5/8	63/64	1-1/2	7/8
1-1/8	7	1-11/16	31/32	1-13/16	1-7/64	1-11/16	1
1-1/4	7	1-7/8	1-1/16	2	1-7/32	1-7/8	1-3/32
1-3/8	6	2-1/16	1-11/64	2-3/16	1-11/32	2-1/16	1-13/64
1-1/2	6	2-1/4	1-9/32	2-3/8	1-15/32	2-1/4	1-5/16
1-3/4	5	2-5/8	1-1/2	2-3/4	1-23/36	-	-
2	4-1/2	3	1-23/32	3-1/8	1-31/32	-	-
2-1/4	4-1/2	-	-	3-1/2	2-13/64	-	-
2-1/2	4	-	-	3-7/8	2-29/64	-	-
2-3/4	4	-	-	4-1/4	2-45/64	-	-
3	4	-	-	4-5/8	2-61/64	-	-
3-1/4	4	-	-	5	3-3/16	-	-
3-1/2	4	-	-	5-3/8	3-7/16	-	-
3-3/4	4	-	-	5-3/4	3-11/16	-	-
4	4	-	-	6-1/8	3-15/16	-	-

Nuts to be used on Hot Dip Galvanized bolts are tapped oversize by the following minimum diametral amounts (ASTM A563):

Diameter, in.	In.
7/16 and under	0.016
Over 7/16 to 1	0.021
Over 1	0.031